

# QUICKFITTING<sup>®</sup>

## HVAC

## CONNECT REFRIGERANT LINES IN SECONDS

### QuickFitting<sup>®</sup> HVAC Push-to-Connect

A product line that provides a quicker and safer connection of HVAC/R systems than traditional methods

**No brazing, flaring or swaging!**



\* Remove yellow dust caps prior to installation.



**INSTALLS FAST**



**NO TOOLS  
NEEDED**



**NO FLAMES**


## WHY PUSH-TO-CONNECT?

### UL CERTIFIED

Approved for major refrigerants, including A2L refrigerants

### DURABLE

Heavy duty, corrosion and UV resistant brass body

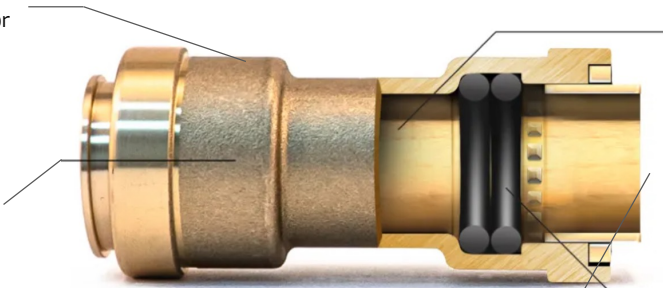

### REMOVABLE

Quickly and easily disconnects with release tool

### LEAK-RESISTANT

Prevents connection leaks caused by galling, vibration, pulsation and extreme temperature changes

### PATENTED DESIGN

Double O-ring and grip ring seal ensures leak-proof connections

### Approved Refrigerants

R22, R32, R134a, R290, R404a, R407a, R407c, R410a, R500, R600a

**A2L Class:** R452B, R454B



[www.QuickFitting.com](http://www.QuickFitting.com)

QUICK FITTING HOLDING COMPANY, LLC.  
655 WATERMAN AVE., EAST PROVIDENCE, RI, USA 02914  
TEL: (877) 238-4826 / FAX: (877) 258-4826

LITGHVACM25

### Approved Applications

- Residential and commercial use
- Copper and coated aluminum line sets
- Mini-split HVAC units
- Unitary indoor coils




### Maximum Rated Pressure




- 870 psi / 60 bar



**5** Year Limited Warranty


5 Yr. Warranty applies to QuickFitting® HVAC PTC fittings. Release tools have a 1 Yr. Limited Warranty

Product Type	Size	QuickFitting #	Grainger #
 Union	1/4"	HV-SC-0250	833J44
	3/8"	HV-SC-0375	833J45
	1/2"	HV-SC-0500	833J46
	5/8"	HV-SC-0625	833J47
	3/4"	HV-SC-0750	833J48
	7/8"	HV-SC-0875	833J49
 Union Reducer	3/8" x 1/4"	HV-CR-375250	833J56
	1/2" x 3/8"	HV-CR-500375	833J57
	5/8" x 1/2"	HV-CR-625500	833J58
 Socket	1/4"	HV-FA-0250	833J62
	3/8"	HV-FA-0375	833J63
	1/2"	HV-FA-0500	833J64
	5/8"	HV-FA-0625	833J65

Product Type	Size	QuickFitting #	Grainger #
 Elbow	1/4"	HV-SE-0250	833J50
	3/8"	HV-SE-0375	833J51
	1/2"	HV-SE-0500	833J52
	5/8"	HV-SE-0625	833J53
	3/4"	HV-SE-0750	833J54
	7/8"	HV-SE-0875	833J55
 Elbow Reducer	3/8" x 1/4"	HV-ER-375250	833J59
	1/2" x 3/8"	HV-ER-500375	833J60
	5/8" x 1/2"	HV-ER-625500	833J61
 Release Tools	1/4", 3/8", 1/2" & 5/8"	HV-RTMT2562K	833J66
	3/4" & 7/8"	HV-RT7587K	833J67

## FIND US ONLINE

- ▶ Visit [Grainger.com](http://Grainger.com)
- ▶ Search for Category Refrigerant Push-to-Connect Tube Fittings
- ▶ Select the Brand QUICKFITTING

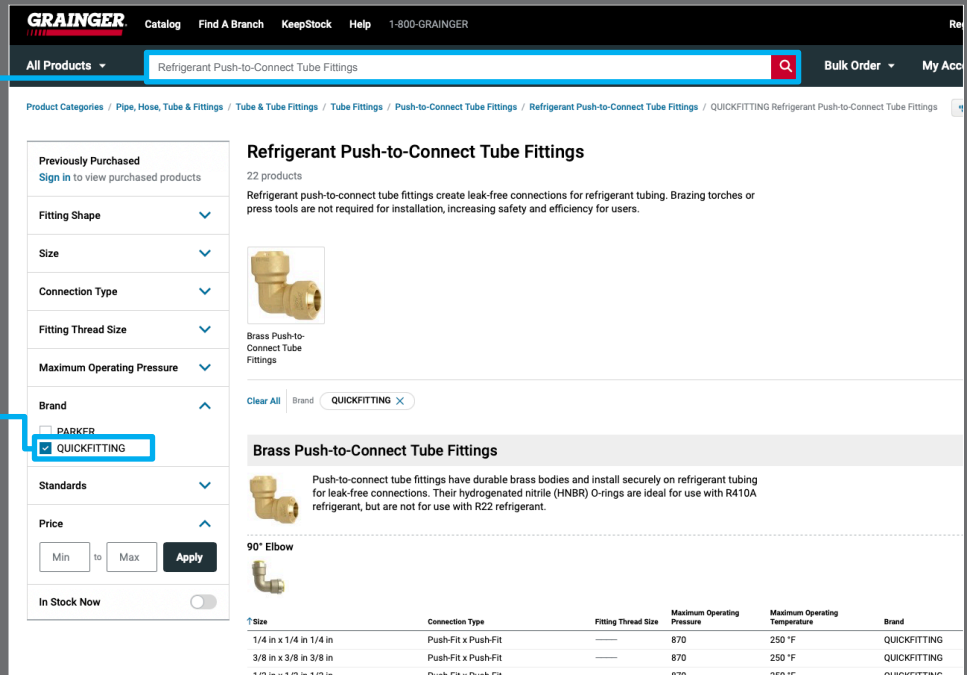

The screenshot shows the Grainger.com website interface. The search bar contains 'Refrigerant Push-to-Connect Tube Fittings'. The left sidebar shows filter options: Fitting Shape, Size, Connection Type, Fitting Thread Size, Maximum Operating Pressure, Brand (with 'QUICKFITTING' selected), Standards, and Price. The main content area displays 'Refrigerant Push-to-Connect Tube Fittings' with 22 products listed. A sub-section for 'Brass Push-to-Connect Tube Fittings' is also visible, along with a table of product specifications.

Size	Connection Type	Fitting Thread Size	Maximum Operating Pressure	Maximum Operating Temperature	Brand
1/4 in x 1/4 in 1/4 in	Push-Fit x Push-Fit	—	870	250 °F	QUICKFITTING
3/8 in x 3/8 in 3/8 in	Push-Fit x Push-Fit	—	870	250 °F	QUICKFITTING
1/2 in x 1/2 in 1/2 in	Push-Fit x Push-Fit	—	870	250 °F	QUICKFITTING

[www.QuickFitting.com](http://www.QuickFitting.com)

QUICK FITTING HOLDING COMPANY, LLC.  
655 WATERMAN AVE., EAST PROVIDENCE, RI, USA 02914  
TEL: (877) 238-4826 / FAX: (877) 258-4826

LITGHVACM25